


DRILL CHUCK HOLDER/ SPH

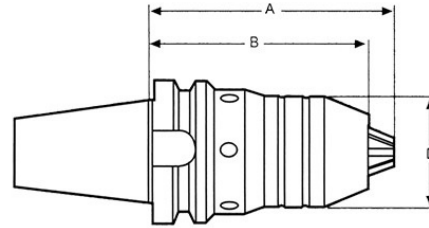

Description/Code No.	Type	Capacity		A mm	B mm	D mm	N.W. (kg)
		mm	inch				
203008	BT30-SPH08-80	0-8	0-5/16	92	83	38	0.9
203013	BT30-SPH13-100	0-13	0-1/2	115	102	50	1.6
204008	BT40-SPH08-85	0-8	0-5/16	96	87	38	1.5
204013	BT40-SPH13-105	0-13	0-1/2	115	102	50	2.1
204016	BT40-SPH16-110	3-16	1/8-5/8	122	109	57	2.5
205013	BT50-SPH13-115	0-13	0-1/2	127	115	50	4.7
205016	BT50-SPH16-120	3-16	1/8-5/8	133	120	57	5.3

Max torque can be up to 600 kgf-cm.

The drill will not be dropped out when the main spindle of machine stops instantly.

The rotation speed can be up to 6000 RPM.